

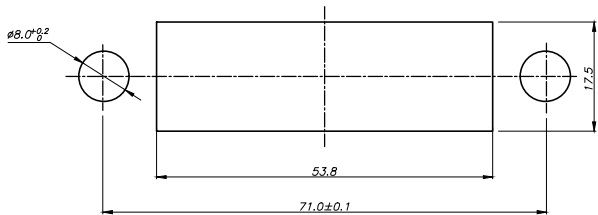
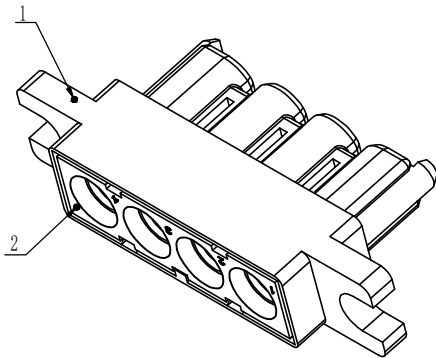
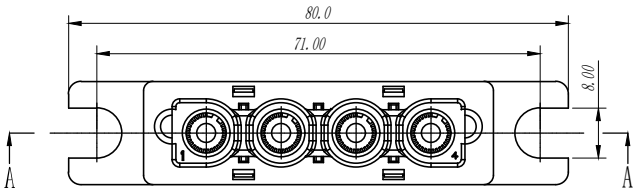
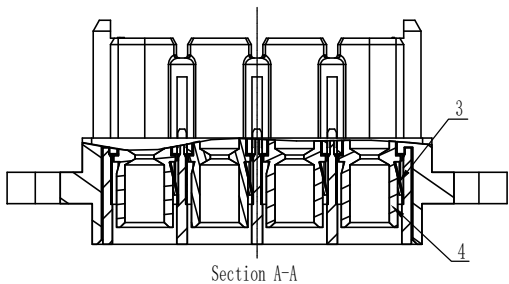


Customer Drawing



REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
X1		First release	01.02/21	David.guo
X2		Add mounting screw	02.04/21	David.guo



RECOMMENDED PCB LAYOUT (±0.05)

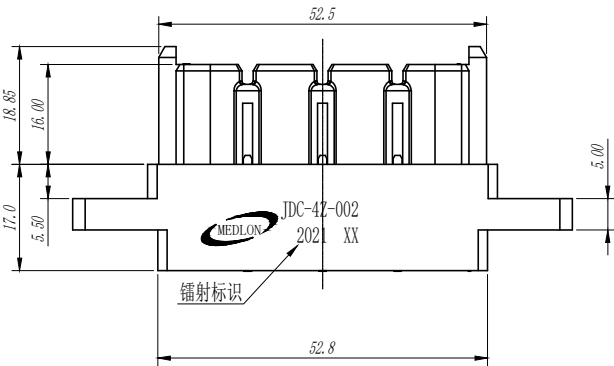

- NOTES:
1. VOLTAGE RATING: 600V DC;
 2. CURRENT RATING: 95A;
 3. CONTACT RESISTANCE $\leq 0.5\text{m}\Omega$;
 4. INSULATING RESISTANCE $\geq 3000\text{M}\Omega$;
 5. WITHSTAND VOLTAGE: 2500V AC;
 6. DURABILITY: 200 CYCLES;
 7. WORK TEMPERATURE: $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$;
 8. CONTACT PARTS PLATING: Ag PLATING;
 9. MATED WIRE QC/T 1037-2016 16mm^2 ;
 10. PARTS RoHS COMPLIANCE;

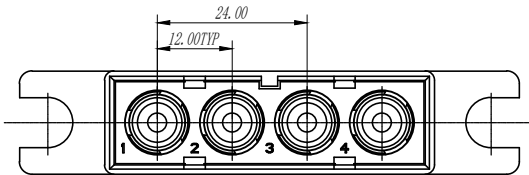

4		Mounting screw	2		Bulk shipment
4		Female pin	4	red copper	Bulk shipment
3		Locating detent	4		
2		Female clamp	1		
1		Female housing	1		
Serial number		Part Number	Description	Quantity	Materials
					Notes
UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.50 .XX +/- 0.30 .XXX +/- 0.10 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS U.S. INCHES METRIC MM			APPROVAL DATE		
			DRAWN		
			CHECKED		
			CHECKED		
			DRAWING FILE :		
			ANGLE OF PROJECTION		
			SHENZHEN MEDLON HARDWARE PRODUCT CO., LTD		
			TITLE: SOCKET POWER CONNECTOR JDC 4 CORES (95A)		
			SIZE A4	DRAWING NO. JDC-4Z-002	REV. X2
			SCALE NONE	SHEET 1 OF 1	